
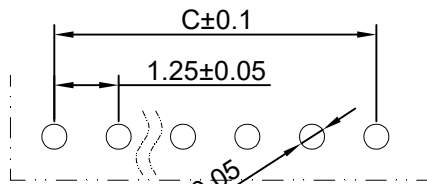
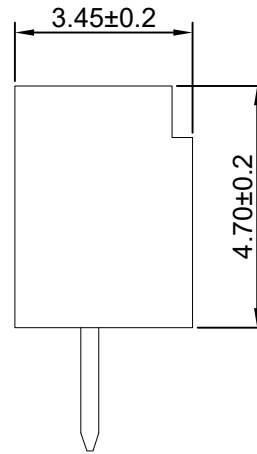
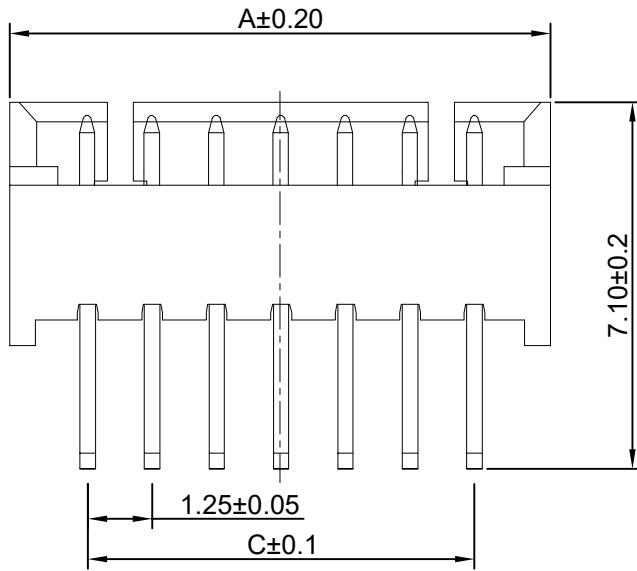


# RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2023.11.25

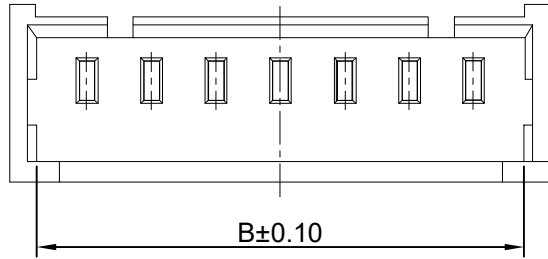

PCB LAYOUT

### SPECIFICATIONS

- Current rating: 1A AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

### Material:

Insulator: PA66 UL 94V-0  
 Contact: Phosphor Bronze or Brass  
 Plating: Plated Tin  
 Circuits: 02~16P  
 Mate with: XFCN P1250 series Housing  
 Ordering Code:

M1250V-XX  
 1 2

- 序列号
- Pin位数 02-16P

No. of PIN/ROW	Dimension		
	A	B	C
2	4.25	3.05	1.25
3	5.50	4.30	2.50
4	6.75	5.55	3.75
5	8.00	6.80	5.00
6	9.25	8.05	6.25
7	10.50	9.30	7.50
8	11.75	10.55	8.75
9	13.00	11.80	10.00
10	14.25	13.05	11.25
11	15.50	14.30	12.50
12	16.75	15.55	13.75
13	18.00	16.80	15.00
14	19.25	18.05	16.25
15	20.50	19.30	17.50
16	21.75	20.55	18.75

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: M1250V-XX		<b>XFCN</b> 兴飞连接器	
TITLE: 1.25mm Crimp Style Connectors			
		0769-82001899	
		www.xfconn.com	
		DWG NO: ,	
APPD	Chen ZhiQiang	VIEW	
CHKD	Liu Wei	SCALE	SHEET
DRAW	Chen HongJiang	SCALE	REV
DATE	2024.05.24	NONE	1/1 A1